


1L40 1L45




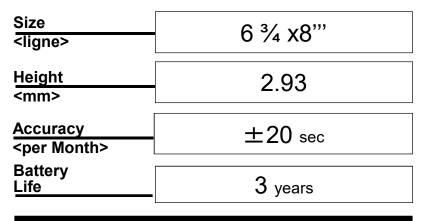



Battery consumption could be minimum by pulling out the stem





Clearance changes subject to the glass, case structure.

Clearance

Original

Package

to the glass, case structure, and the length of the hand.

\$ 0.15-0.45mm. 1,000pcs

0.30-0.40mm.

Movement

case

The Distance to Small Second 1L40 : 5.0 1L45 : 6.61

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

10 sec 10 sec 10 sec

