


RONDA powertech 500 and 762E, 763E

Affordable metal movements
for reliable quality watches

Caliber 515S – 11½'''

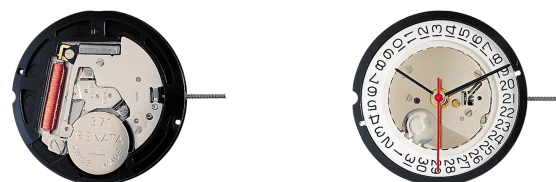

Product Specifications

Analog quartz movement

Line powertech

Caliber 515S

Size 11½'''

Version Swiss Made 1 Jewels / nickel plated
Swiss Parts 1 Jewels / nickel plated

Standard battery life 24 months

Hand fitting height 1

Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%
- Interchangeability: All versions 11½''' with same movement height 3.00 mm and stem height 1.50 mm
- Very powerful stepping motor
- Fix motor pulse

Functions

- Option for second disc
- Date
- 3 hands

Technical Specifications

| | |
|--------------------------------|--------------------------------------|
| Diameter Total | 26.00 mm |
| Case fitting | 25.60 mm |
| Movement height | 3.00 mm |
| Height over standard battery | 3.25 mm |
| Movement rest | 0.80 mm |
| Height over stem | 1.50 mm |
| Length of stem travel | 1.00 mm |
| Stem thread | 0.90 mm |
| Standard battery | 371 |
| Standard battery life | 24 months |
| Battery voltage | 1.5 V |
| Current consumption – typical | 2.4 µA (Date Mechanism not in Gear) |
| Current consumption – maximum | 2.65 µA (Date Mechanism not in Gear) |
| Useful torque second – typical | 9 µNm |
| Useful torque minute – typical | 450 µNm |
| Operating temperature | 0 - 50 °C |
| Instantaneous rate | -10/ +20 sec/month |
| Resistance to magnetic fields | 18.8 Oe |
| Resistance against shock | NIHS 91-10 |

Watch production

- Drawing Casing ring (standard, PDF)
- Drawing Dial (stem 3h, calendar 4h, PDF)
- Drawing Dial (stem 3h, calendar 6h, PDF)
- Drawing Dial (stem 3h, calendar 3h, round, PDF)
- Drawing Dial (stem 3h, calendar 6h, round, PDF)
- Drawing Hand fitting (Zeigerwerkhöhe 1-2, 6, PDF)
- Drawing Stem

User's manual

- User's manual (PDF)

Watch repairs

- Technical instruction (PDF)

