

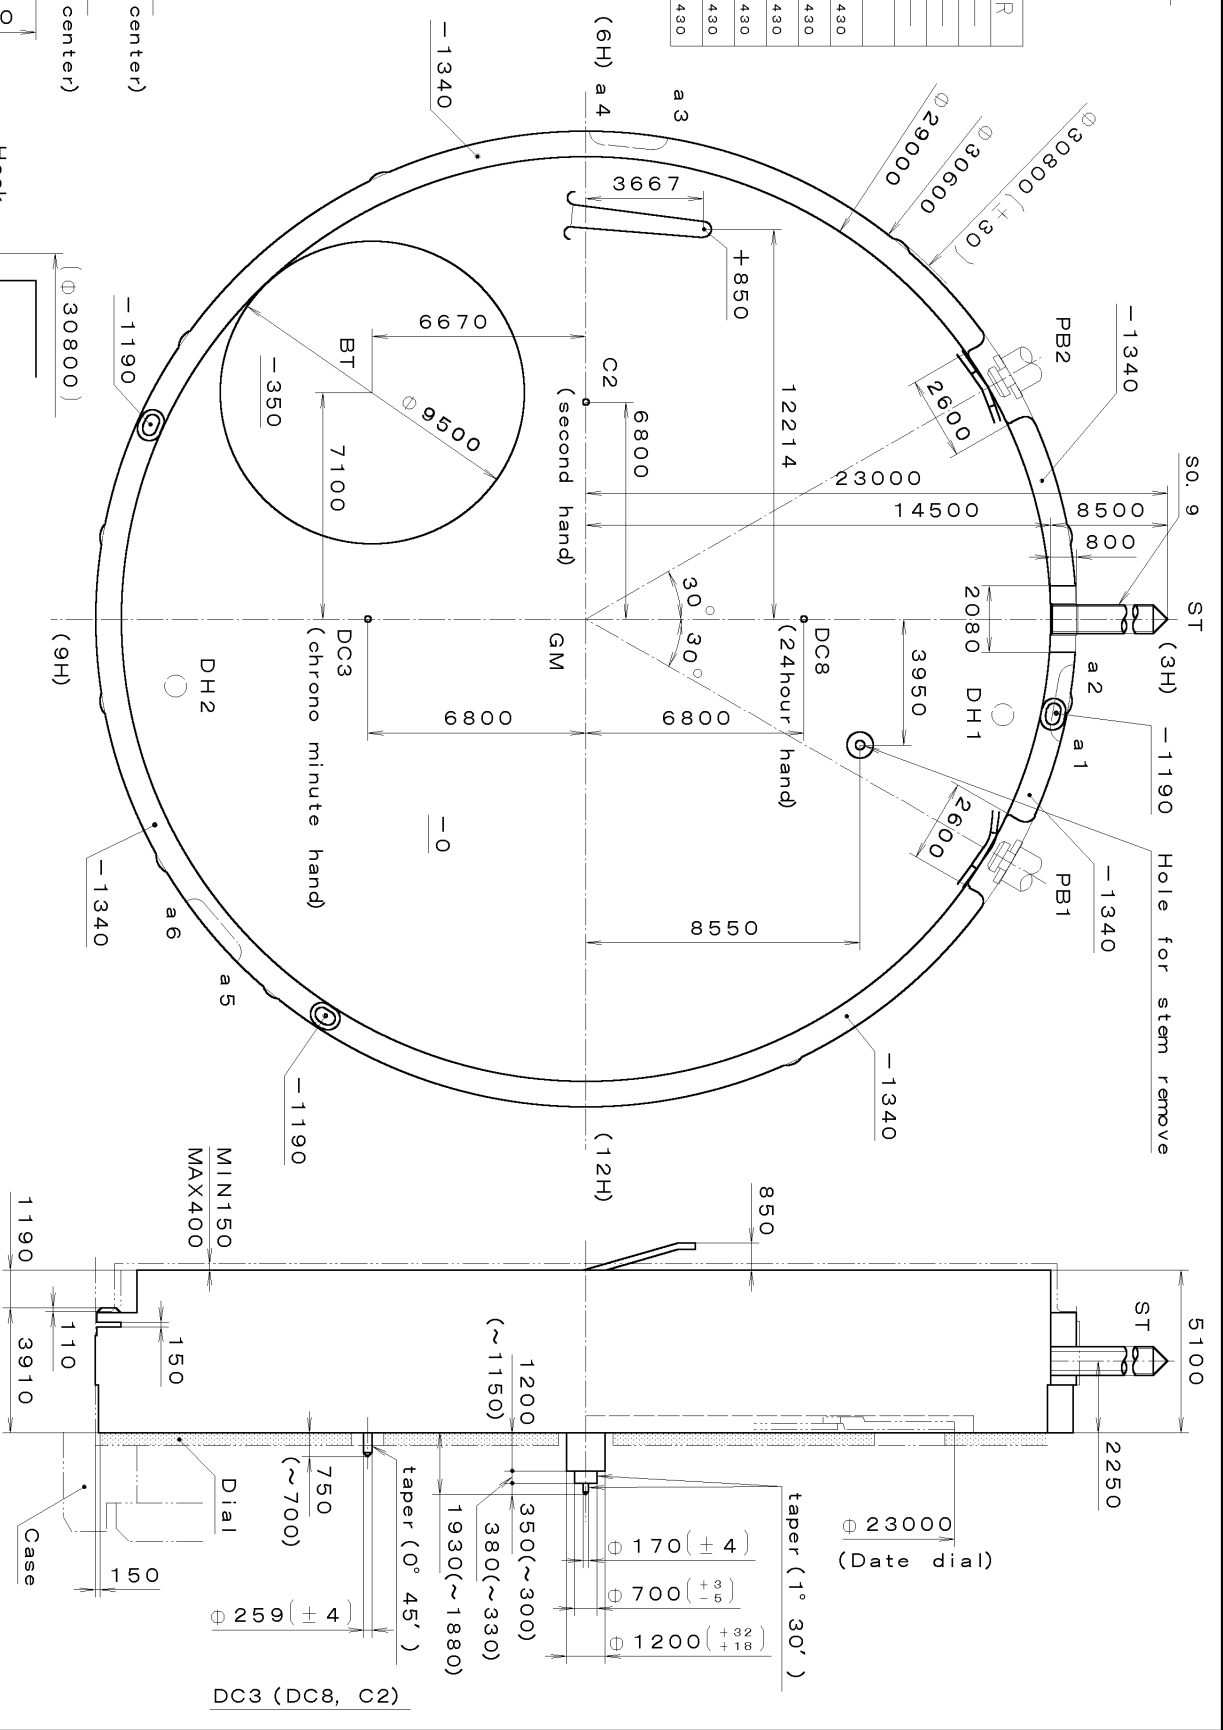


DH1~DH2=25816 (±20)
Stroke for PB must be minimum 600 [+0] μm

Coordinates			
Mark	X	Y	R
GM	0	0	—
DH1	3000	13000	—
DH2	2100	-12800	—
a1	3441	14908	430
a2	1865	15186	430
a3	-15151	2129	430
a4	-15291	535	430
a5	10434	-11190	430
a6	9208	-12219	430





Quantity	Unit	Cal. No. :
1	1/1000 mm	OS20
1	6:1	Parts:
1	Drawn	Name:
1	Checked	T. Hiruta
1	Approved	Frame for Case
Material		Drawing No. : OS20C000
Heat Treatment		
Hardness		
Plating		
General Tolerances		
Dimensions		
Angles		



MIYOTA



This drawing is provisional and subject to our reconfirmation and/or revision without notice.

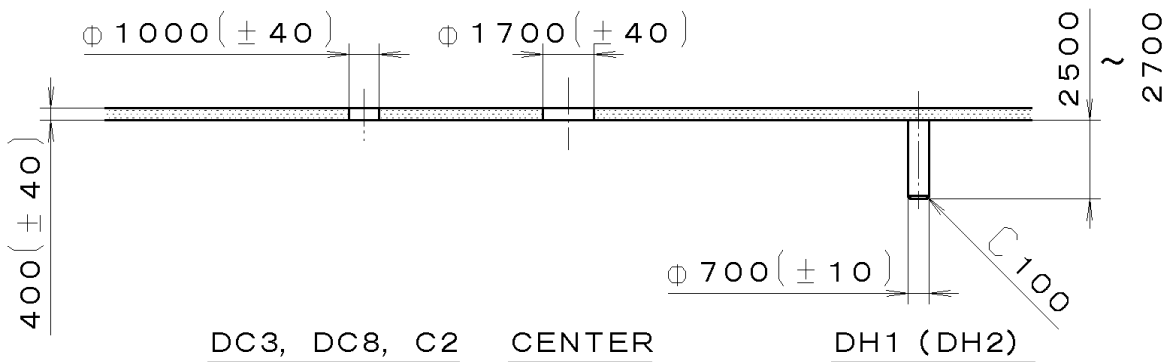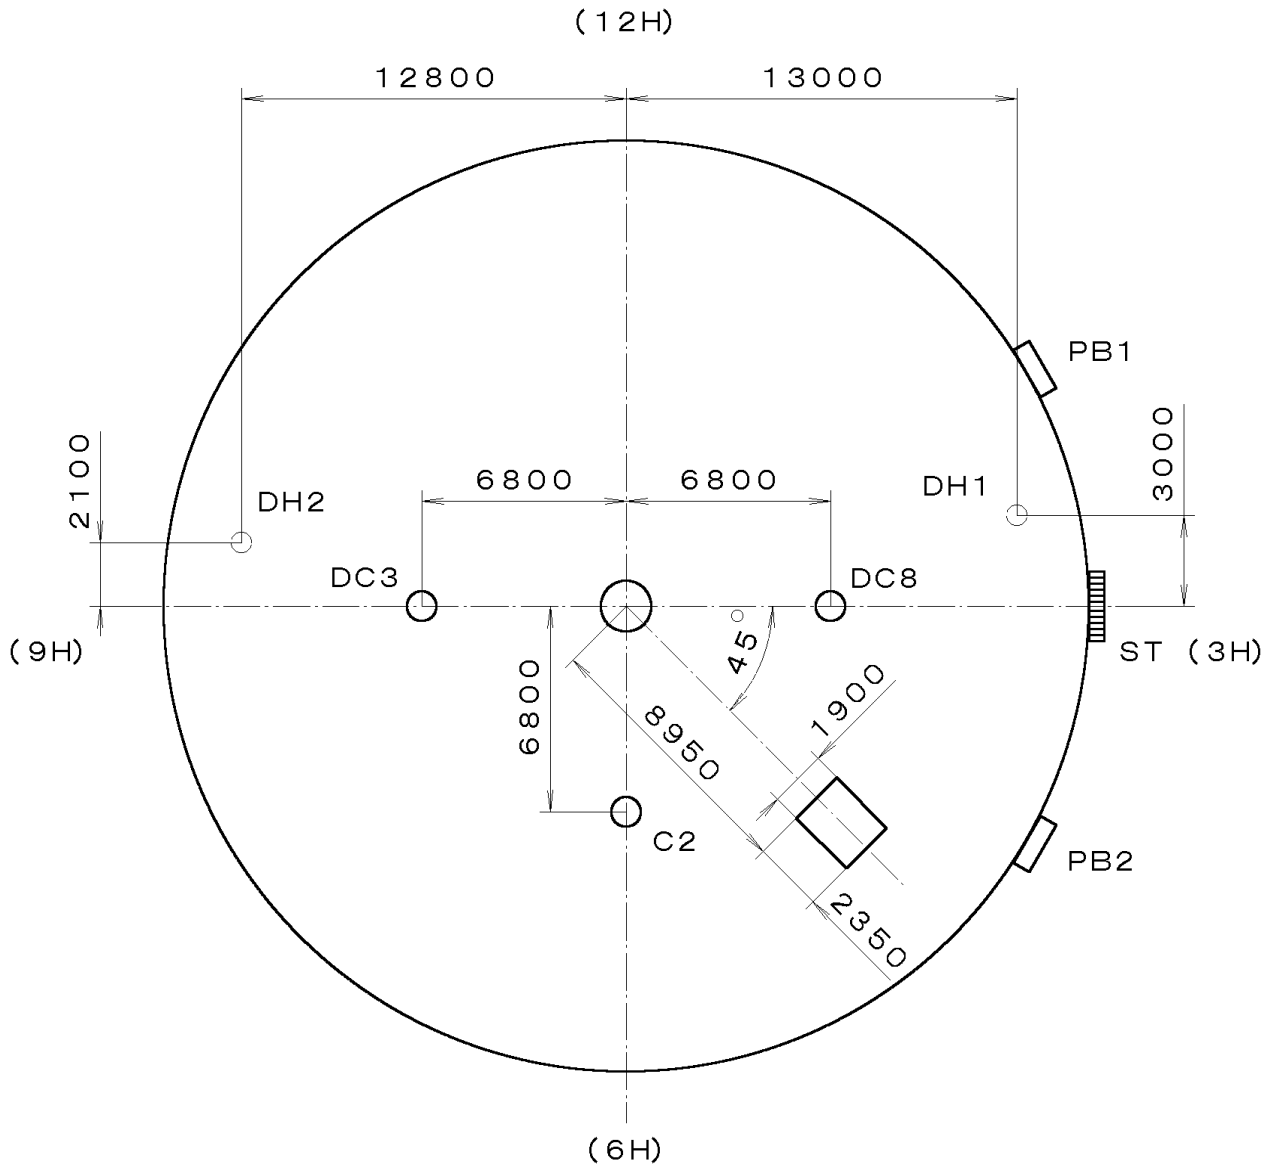

DC3, DC8, C2 CENTER DH1 (DH2)

OS20-00A (01) *** (2100 1121) 01-01-30	7	Quantity		Cal. No. : OS20-00A
	6	Unit	1/1000 mm	
	5	Scale	4:1	Parts:
	4	Date		
	3	Drawn		
	2	Checked	T. Hiruta	Name:
	1	Approved		Indications for Dial
Material			Drawing No. : OS20D000	
Heat Treatment		General Tolerances	MIYOTA	
Hardness		Dimensions		
Plating		Angles		

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

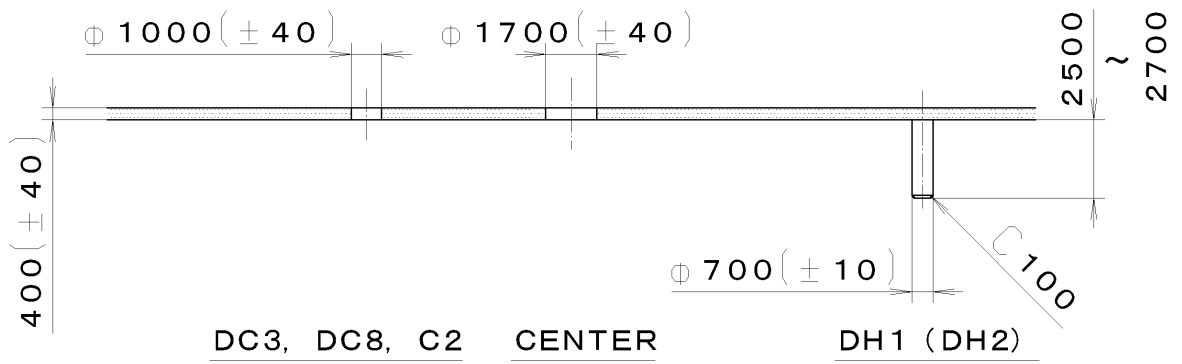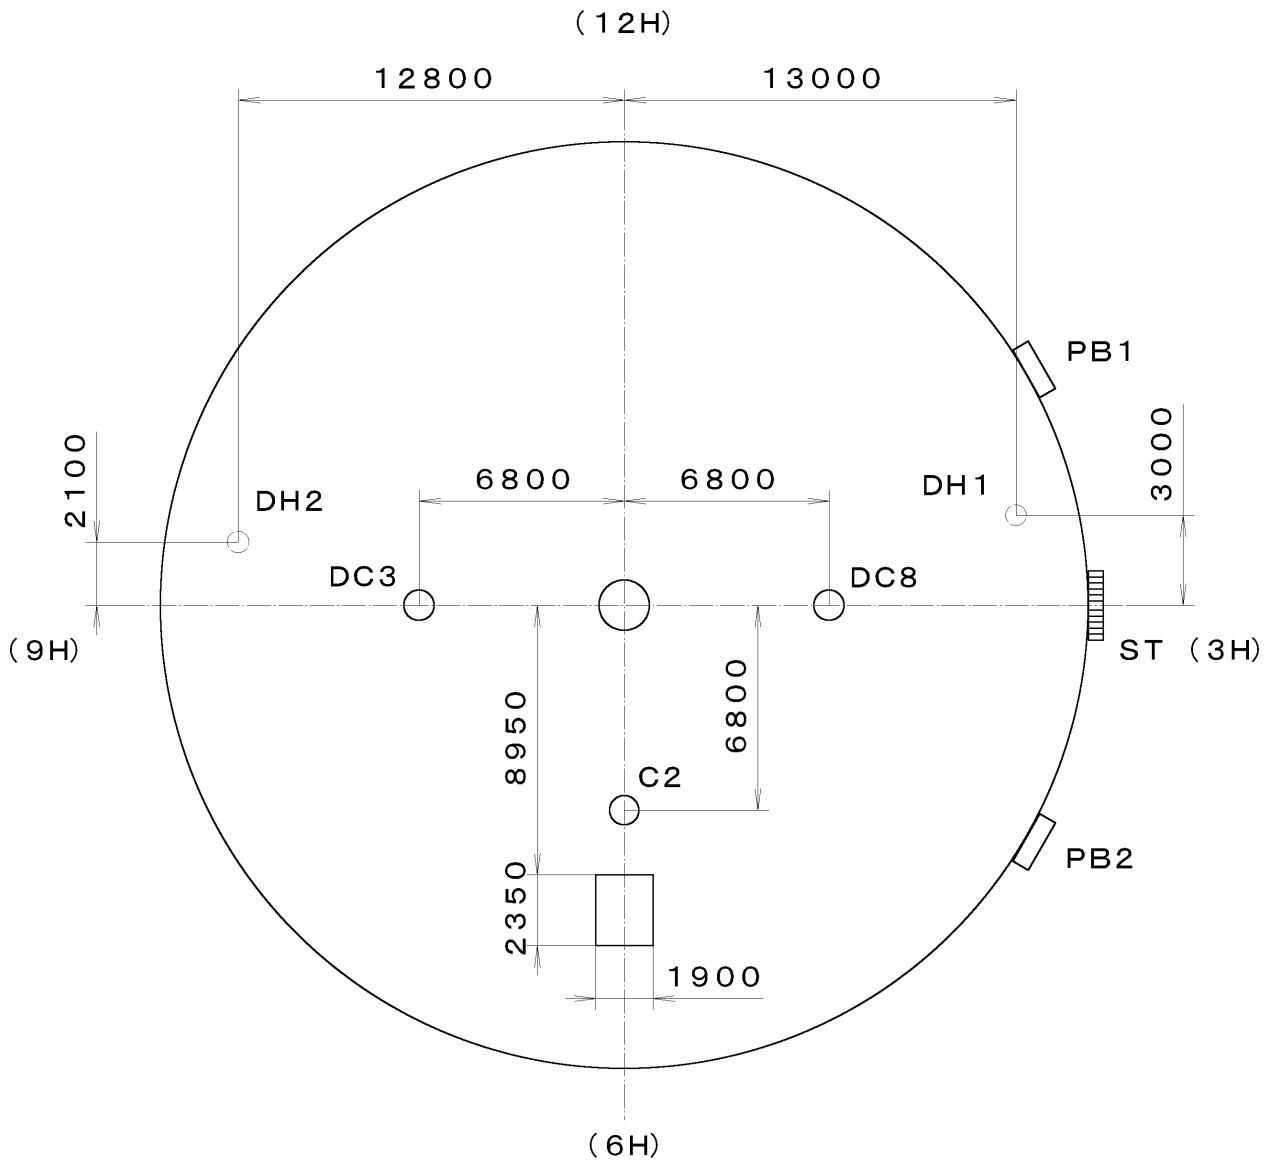


DC3, DC8, C2 CENTER DH1 (DH2)

*** T I P W OS20-00Z (01) *** (2100 1121) 01-12-04

△1		Quantity		Cal. No. :	OS20-00Z
△2		Unit	1/1000 mm	Parts:	
△3		Scale	4:1	Name:	Indications for Dial
△4		Date		Approved	Drawing No. : OS20D010
△5		Drawn		MIYOTA	
△6		Checked	T. Hiruta		
△7		Material			
△8		Heat Treatment			
		Hardness	General Tolerances		
		Plating	Dimensions		
			Angles		

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

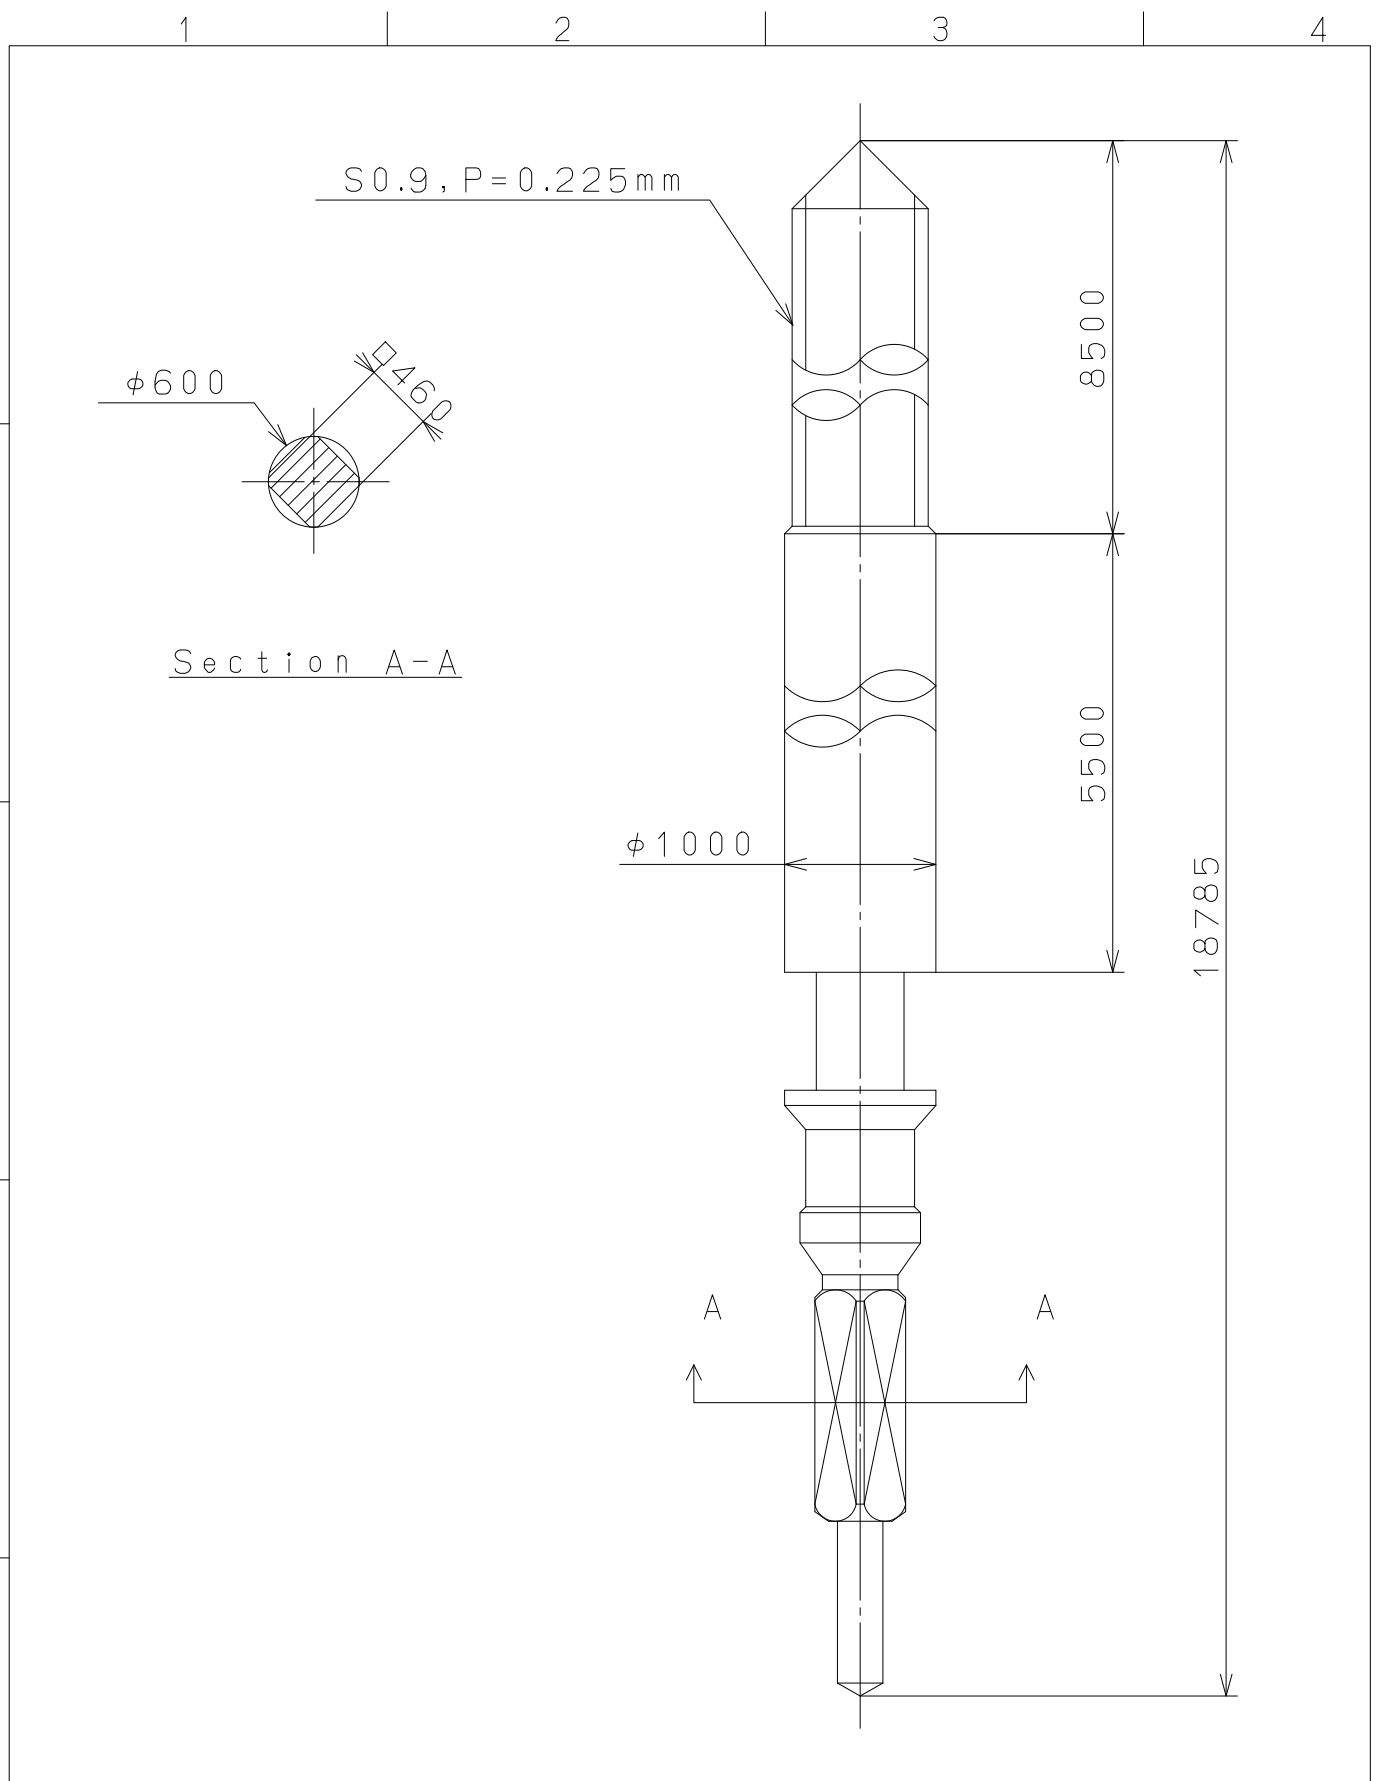

△5			Quantity		Cal.NO.:
△4			Unit	1 / 1000 mm	
△3			Scale	20 : 1	Parts No.:
△2			Date		065-453
△1			Drawn		
Mark	Date	Description	Appr.	Checked	E. Murakami
Alterations			Approved	Name:	
			SETTING STEM		
Material					Drawing No.: 4530S000
Heat Treatment					MIYOTA
Hardness					
Plating					
			General Tolerances	CITIZEN WATCH CO., LTD. TOKYO, JAPAN	
			Dimensions		
			Angles		