


DISPLAY AND CROWN / BUTTON OPERATION

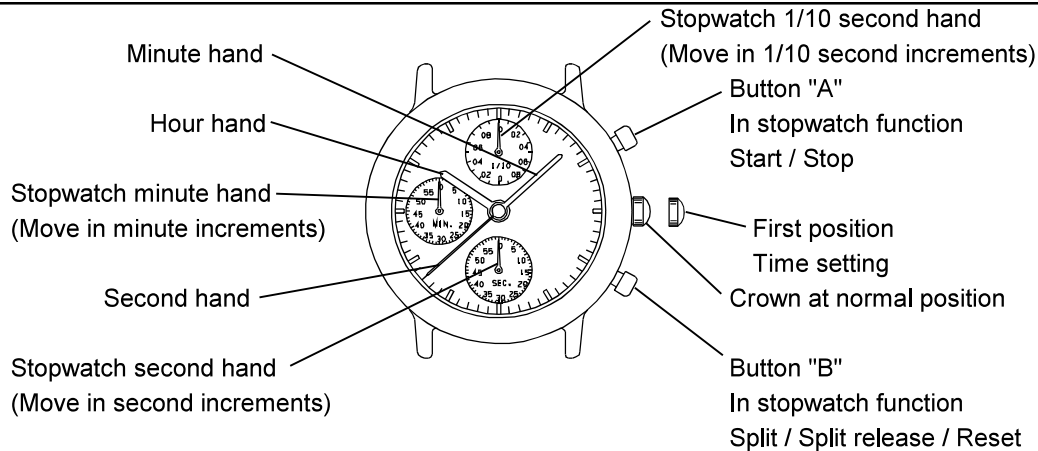

- *The measurement time indicated by the stopwatch hands that move independently of center hands.
- *Stopwatch 1/10 second hand moves for a first minute.
After one minute, it indicates the measurement time when it is stopped.


ADJUSTING THE STOPWATCH HAND POSITION

Before setting the time, check if the stopwatch 1/10 second, second and minute hands are in the "0" (12 o'clock) position.

*If the stopwatch is in use, press the button in the following order to reset it, and then, check if the hands return to "0" position. (For details, see "HOW TO USE THE STOPWATCH")

- * If the stopwatch is counting : A → B
- * If the stopwatch is stopped : B
- * If the split time is displayed : B → A → B

If either of the stopwatch hands are not in the "0" position, reset them following the procedure below.

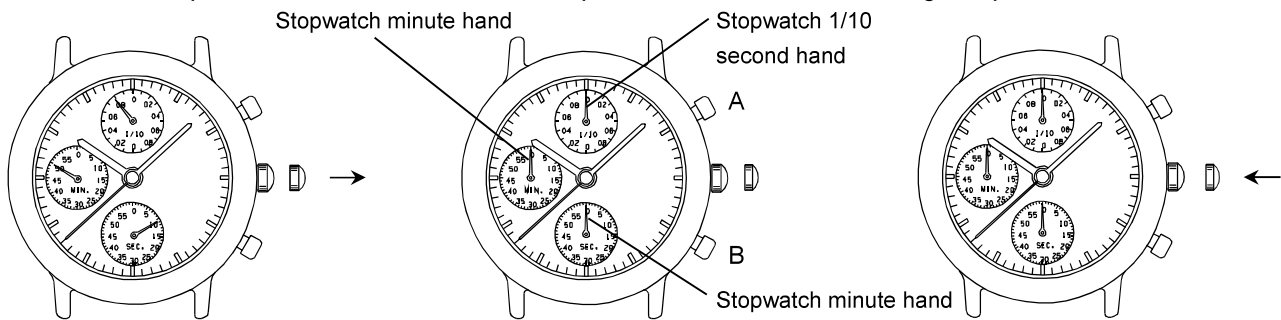


1.Pull out the crown.

2.Press button A or B to reset the stopwatch 1/10 second, second and minute hands to "0" position.


3.Push the crown back to the normal position.

- *By pressing button A set the stopwatch 1/10 second hand.
- *By pressing button B set the stopwatch second and minute hands.

- *The stopwatch minute hand moves correspondingly with the stopwatch second hand.
- *The hands move quickly if the respective buttons are kept pressed.


TIME SETTING

1. Pull out the crown to the second hand is at the 12 o'clock position. The second hand will stop on the spot.



2. Turn the crown to set the hour, minute hands to the desired time.

* Do not press any button. Otherwise, the chronograph hands will move.



3. Push the crown back in to the normal position in accordance with a time signal.

