


# RONDA slimtech 1000

Extra small and slim movements  
for exclusive styles

*Caliber 1069 – 6<sup>3</sup>/<sub>4</sub> x 8<sup>'''</sup>*

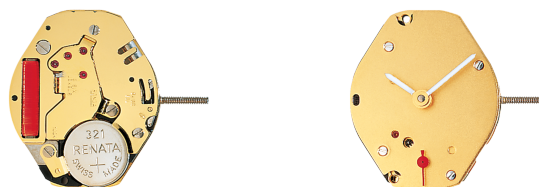

## Product Specifications

Analog quartz movement

Line	slimtech
Caliber	1069
Size	6 <sup>3</sup> / <sub>4</sub> x 8 <sup>'''</sup>
Version	Swiss Made Swiss Parts
Standard battery life	25 months
High battery life	34 months
Hand fitting height	1

## Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%
- Remote sweep second for men - at 6.3 mm from the center

**Functions**

- Small second
- 2 hands

**Technical Specifications**

Diameter Total	15.30 mm
Case fitting	15.30 mm
Movement height	2.30 mm
Height over standard battery	2.35 mm
Height over high battery	3.00 mm
Movement rest	0.40 mm
Height over stem	1.15 mm
Length of stem travel	0.35 mm
Stem thread	0.90 mm
Standard battery	321
High battery	364
Standard battery life	25 months
High battery life	34 months
Battery voltage	1.5 V
Current consumption – typical	0.82 $\mu$ A
Current consumption – maximum	1.15 $\mu$ A
Useful torque second – typical	5 $\mu$ Nm
Useful torque minute – typical	250 $\mu$ Nm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

**Watch production**

Drawing Casing ring (standard, PDF)  
 Drawing Casing ring (high battery, PDF)  
 Drawing Dial (stem 3h, PDF)  
 Drawing Hand fitting (hand height 0-2, PDF)  
 Drawing Stem

**Watch repairs**

Technical instruction (PDF)

