

# UNIVERSAL MASTERPIECE BORN IN JAPAN MADE IN JAPAN

#### **METAL MOVEMENT**


# INSTRUCTION MANUAL FOR MIYOTA WATCH MOVEMENT CALIBRE NO. JS36

STOPWATCH FUNCTION: SMALL SECOND HAND TIME MEASUREMENT UP TO 29min 59 sec

**BATTERY: SR621SW** 

- A) DISPLAYS AND BUTTONS
- **B) SETTING THE TIME**
- C) SETTING THE DATE
- D) USING THE STOPWATCH
- **E) STOPWATCH RESET**

#### A) DISPLAYS AND BUTTONS

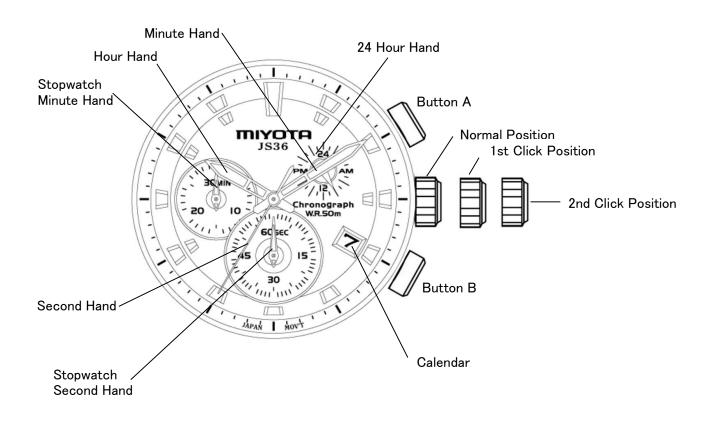

# **B) SETTING THE TIME**

- 1. Pull the crown out to the 2nd Click Position.
- 2. Turn the crown to set hour and minute hands.
- 3. After the time has been set, push the crown back to the Normal position.

# C) SETTING THE DATE

- 1. Pull the crown out to the 1st Click Position.
- 2. Turn the crown clockwise to set the date.
  - \* If the date is set between the hours of around 9:00 PM and 1:00 AM, the date may not change on the following day.
- 3. After the date has been set, push the crown back to the Normal position.

#### D) USING THE STOPWATCH

This stopwatch is able to measure and display time in 1/1 second united up to maximum of 30 minutes. Stopwatch will stop automatically after running continuously for 30 minutes.

#### [Measuring time with the stopwatch]

- 1. Press button " A " to start the stopwatch.
- 2. The stop watch can be started and stopped each time button "A" is pressed.
- 3. Pressing button "B" resets the stopwatch and stopwatch minute and second hands return to their Zero positions



# E) STOPWATCH RESET (INCL. AFTER REPLACING BATTERY)

This procedure should be performed when the stopwatch second & minute hand does not return to the Zero position.

- 1. Pull the crown out to the 2nd Click Position.
- 2. Press the button "A" to set the stopwatch second hand forward. Press the button "B" to set the stopwatch second hand back.
  - \* The stopwatch minutes hand is syncronized with stop watch second hand.
  - \* The stopwatch second hand can be advanced rapidly by continuously pressing button "A" or "B".
- 3. Once the both hands been zeroed, reset the time and return the crown to its normal position.

These specifications might be changed without prior notice.

CITIZEN WATCH CO., LTD.