


# RONDA normtech 700 & 6000

Lange Batterielaufzeit und spezielle Funktionen

*Caliber 763 – 6<sup>3</sup>/<sub>4</sub> x 8'''*

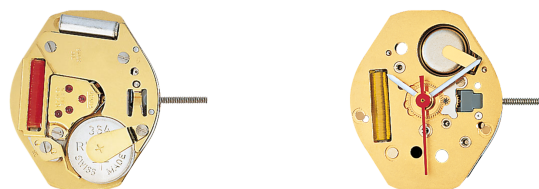

## Product Specifications

Analog quartz movement

Line normtech

Caliber 763

Size 6<sup>3</sup>/<sub>4</sub> x 8'''

Version Swiss Made 5 Jewels / gold plated

Standard battery life 40 months

Hand fitting height 1

## Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%
- Many high hand heights available

**Functions**

– 3 hands

**Technical Specifications**

Diameter Total	15.30 mm
Case fitting	15.30 mm
Movement height	2.50 mm
Height over standard battery	2.65 mm
Movement rest	0.40 mm
Height over stem	1.00 mm
Length of stem travel	0.40 mm
Stem thread	0.90 mm
Standard battery	364
Standard battery life	40 months
Battery voltage	1.5 V
Current consumption – typical	0.7 µA
Current consumption – maximum	1.1 µA
Useful torque second – typical	5 µNm
Useful torque minute – typical	250 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

**Watch production**

Drawing Casing ring (standard, PDF)  
 Drawing Casing ring (high battery, PDF)  
 Drawing Dial (stem 3h, PDF)  
 Drawing Hand fitting (hand height 0-6, A, PDF)  
 Drawing Stem

**Watch repairs**

Technical instruction (PDF)

