


# RONDA normtech 700 & 6000

Lange Batterielaufzeit und spezielle Funktionen

*Caliber 783 – 8<sup>3</sup>/<sub>4</sub>'''*

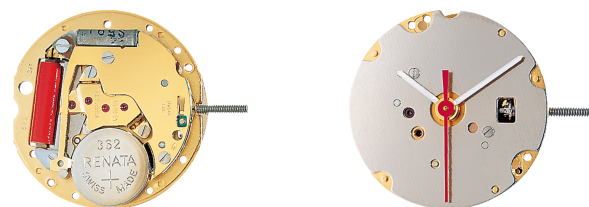

## Product Specifications

Analog quartz movement

Line normtech

Caliber 783

Size 8<sup>3</sup>/<sub>4</sub>'''

Version Swiss Made 5 Jewels / gold plated  
Swiss Parts 1 Jewels / nickel plated

Standard battery life 42 months

Hand fitting height 1

## Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%
- Movement available as 2 or 3 hands version

**Functions**

– 3 hands

**Technical Specifications**

Diameter Total	20.00 mm
Case fitting	19.40 mm
Movement height	2.50 mm
Height over standard battery	2.75 mm
Movement rest	0.30 mm
Height over stem	1.00 mm
Length of stem travel	0.50 mm
Stem thread	0.90 mm
Standard battery	362
Standard battery life	42 months
Battery voltage	1.5 V
Current consumption – typical	0.82 µA
Current consumption – maximum	1.35 µA
Useful torque second – typical	7 µNm
Useful torque minute – typical	350 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

**Watch production**

Drawing Casing ring (standard, PDF)

Drawing Dial (stem 3h, PDF)

Drawing Hand fitting (hand height 0-5, PDF)

Drawing Stem

**Watch repairs**

Technical instruction (PDF)

