


RONDA slimtech 1000

Extra small and slim movements
for exclusive styles

Caliber 1062 – 6³/₄ x 8'''

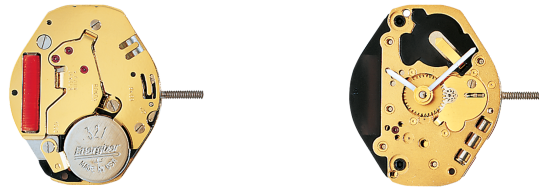

Product Specifications

Analog quartz movement

Line slimtech

Caliber 1062

Size 6³/₄ x 8'''

Version Swiss Made 4 Jewels / gold plated
Swiss Parts 1 Jewels / nickel plated

Standard battery life 6 Years

Hand fitting height 1

Features

- Repairable metal watch movement
- Very long battery life
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%
- Complete interchangeability between 1062-1064

Functions

– 2 hands

Technical Specifications

Diameter Total	15.30 mm
Case fitting	15.30 mm
Movement height	1.90 mm
Height over standard battery	1.95 mm
Movement rest	0.40 mm
Height over stem	0.75 mm
Length of stem travel	0.35 mm
Stem thread	0.90 mm
Standard battery	321
Standard battery life	6 Years
Battery voltage	1.5 V
Current consumption – typical	0.29 µA
Current consumption – maximum	0.35 µA
Useful torque minute – typical	32 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

Watch production

Drawing Casing ring (standard, PDF)
 Drawing Casing ring (high battery, PDF)
 Drawing Dial (stem 3h, PDF)
 Drawing Hand fitting (hand height 0-2, PDF)
 Drawing Stem

Watch repairs

Technical instruction (PDF)

