


RONDA normtech 700 & 6000

Lange Batterielaufzeit und spezielle Funktionen

Caliber 785 – 8³/₄'''

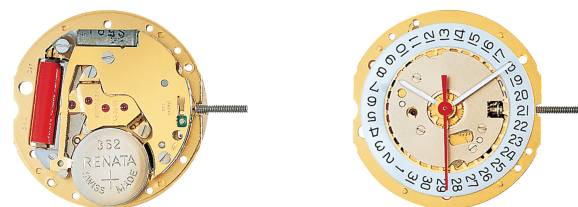

Product Specifications

Analogue quartz movement	
Line	normtech
Caliber	785
Size	8 ³ / ₄ '''
Version	Swiss Made Swiss Parts
	5 Jewels / gold plated 1 Jewels / nickel plated
Standard battery life	42 months
Hand fitting height	1

Features

- Repairable metal watch movement
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%

Functions

- Date
- 3 hands

Technical Specifications

Diameter Total	20.00 mm
Case fitting	19.40 mm
Movement height	2.50 mm
Height over standard battery	2.75 mm
Movement rest	0.30 mm
Height over stem	1.00 mm
Length of stem travel	0.90 mm
Stem thread	0.90 mm
Standard battery	362
Standard battery life	42 months
Battery voltage	1.5 V
Current consumption – typical	0.82 µA (Date Mechanism not in Gear)
Current consumption – maximum	1.35 µA (Date Mechanism not in Gear)
Useful torque second – typical	7 µNm
Useful torque minute – typical	350 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

Watch production

Drawing Casing ring (standard, PDF)
 Drawing Dial (stem 3h, calendar 3h, PDF)
 Drawing Dial (stem 3h, calendar 3h, round, PDF)
 Drawing Dial (stem 3h, calendar 4h, round, horizontal, PDF)
 Drawing Dial (stem 3h, calendar 6h, PDF)
 Drawing Dial (stem 3h, calendar 6h, round, PDF)
 Drawing Dial (stem 3h, calendar 5h, PDF)
 Drawing Hand fitting (hand height 6, PDF)
 Drawing Hand fitting (hand height 0-5, PDF)
 Drawing Stem

User's manual

User's manual (PDF)

Watch repairs

Technical instruction (PDF)

